



MAGNA3

Further product
documentation



net.grundfos.com/qr/i/98091805

be
think
innovate

GRUNDFOS 



MAGNA3



MAGNA3 D





Max. 95 % RH
IPX4D



Min./Max.
-10 °C – +110 °C



PN 6:6 bar / 0.6 MPa
PN 10:10 bar / 1.0 MPa
PN 16:16 bar / 1.6 MPa







Min./Max.
0 °C – +40 °C












< 43 dB(A)



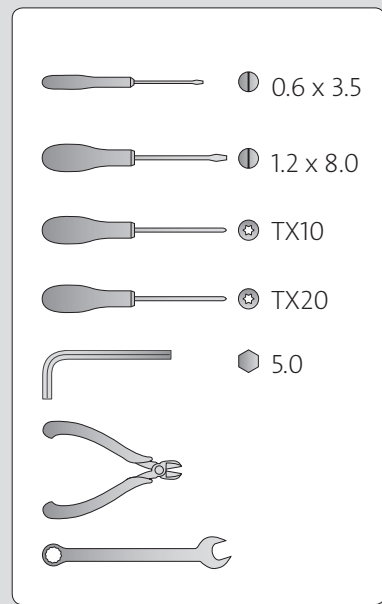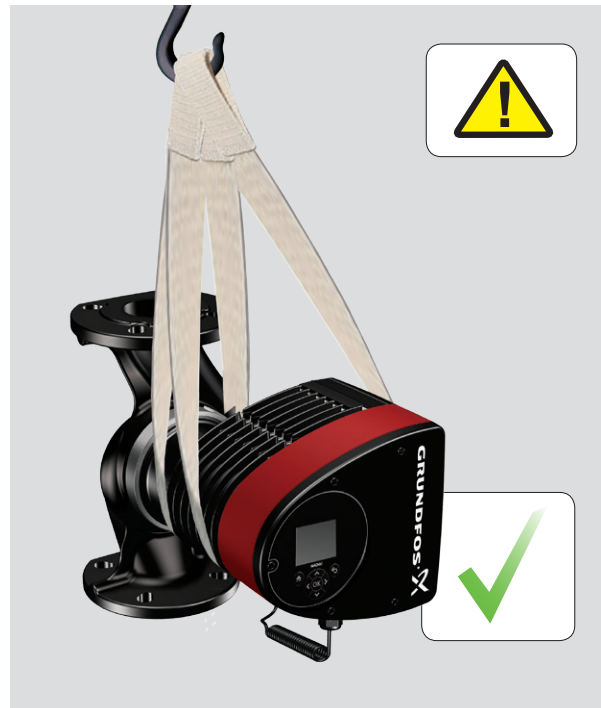

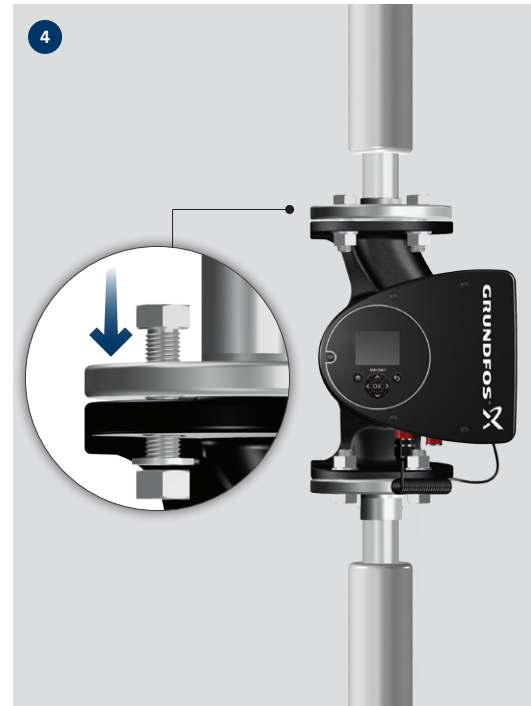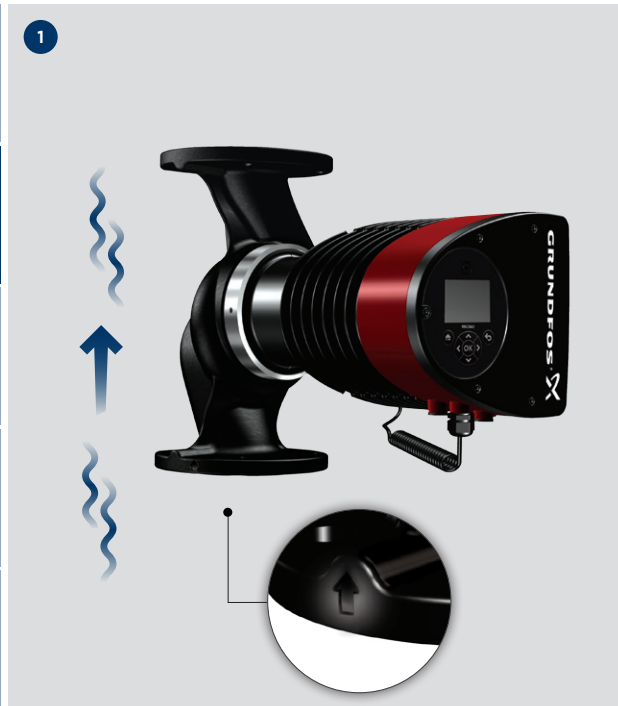


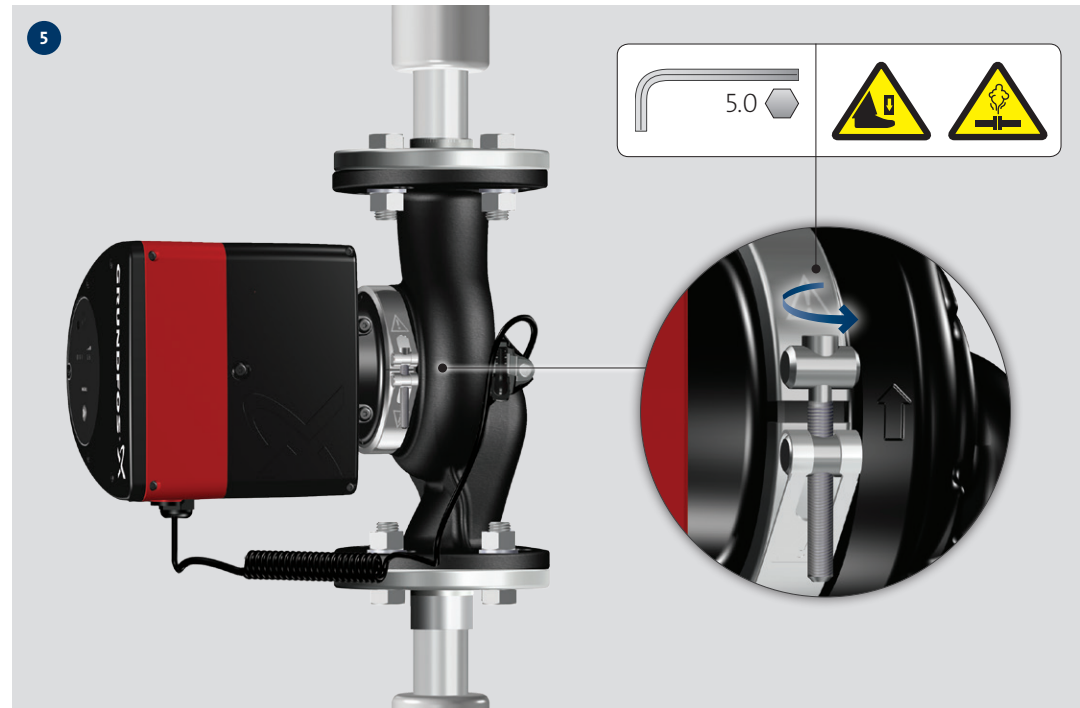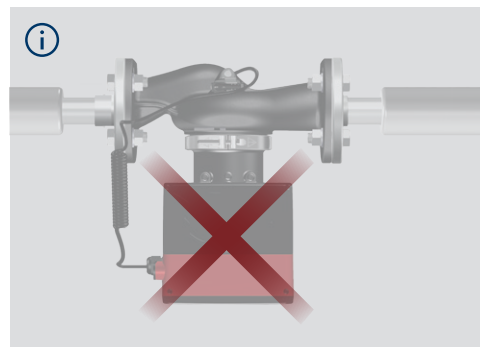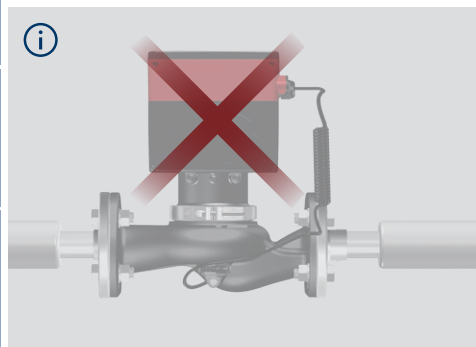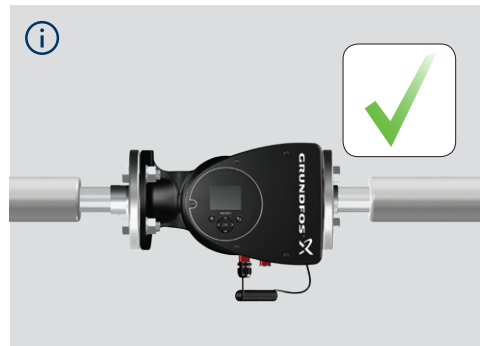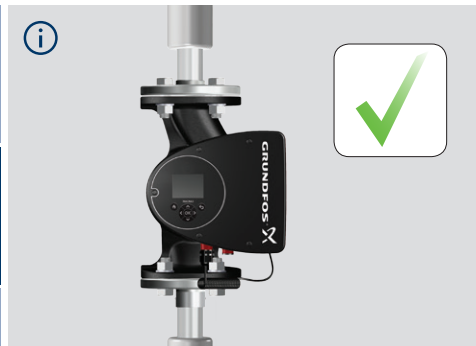

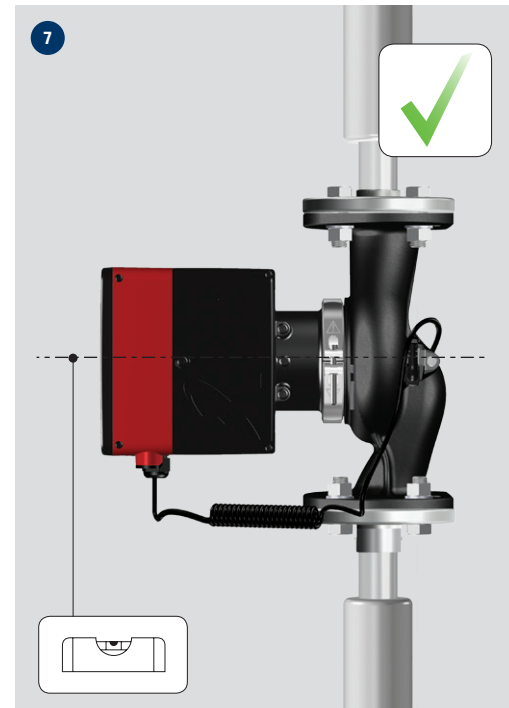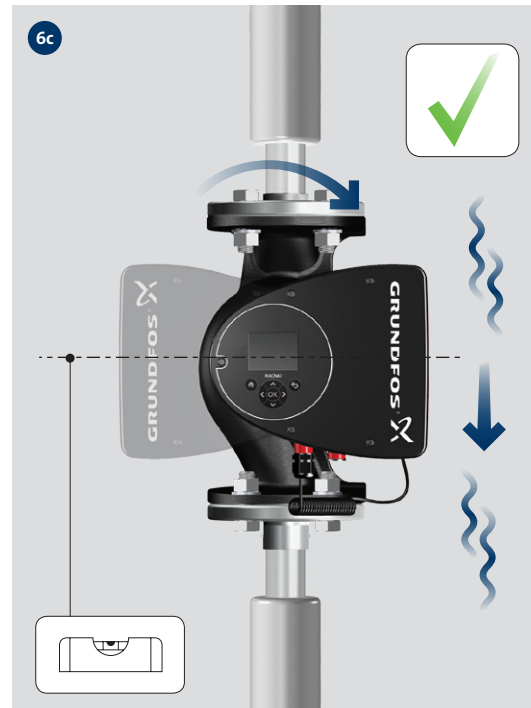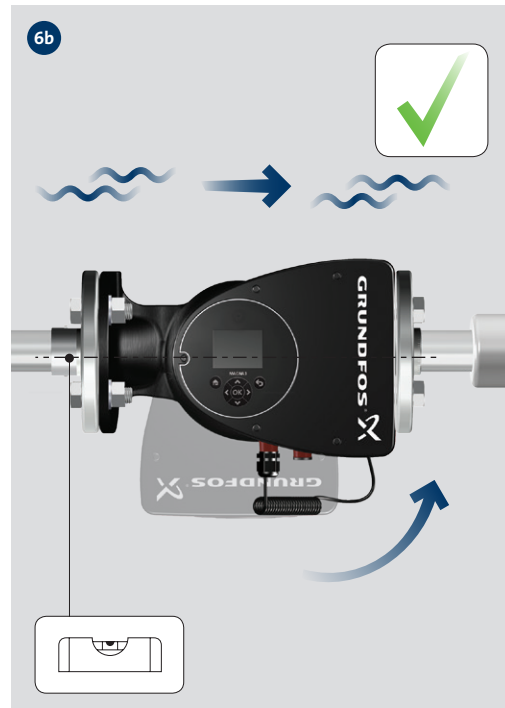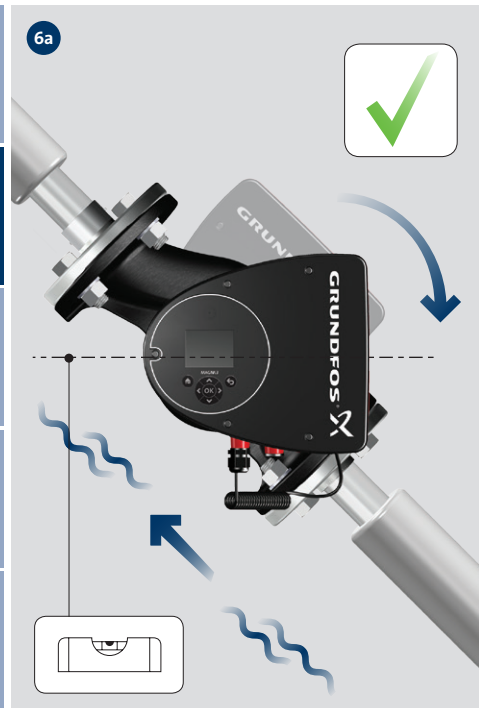




8

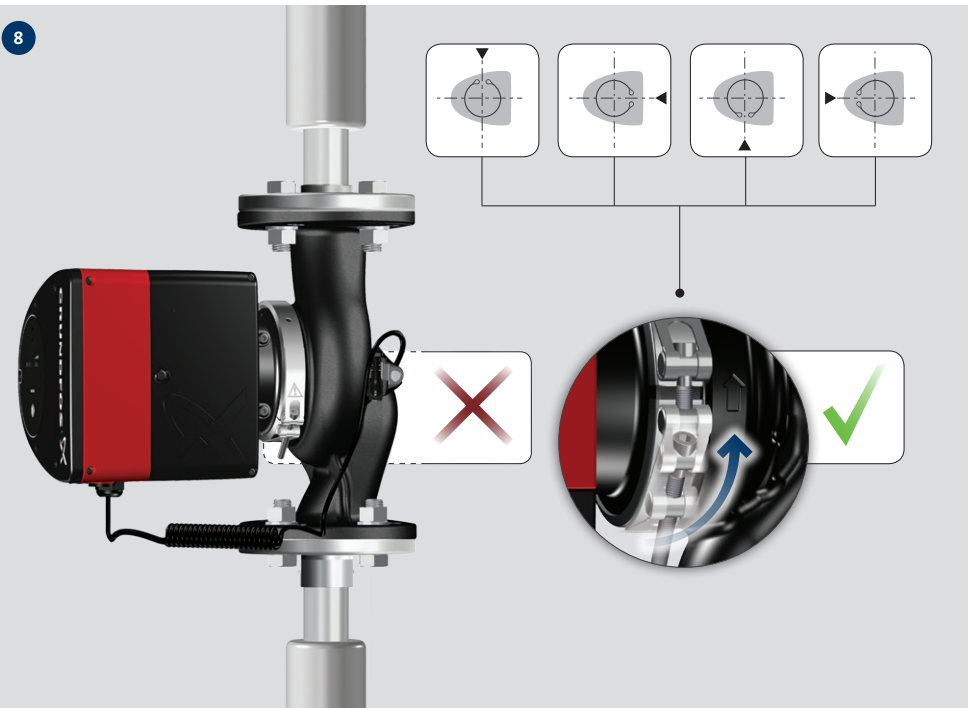

9

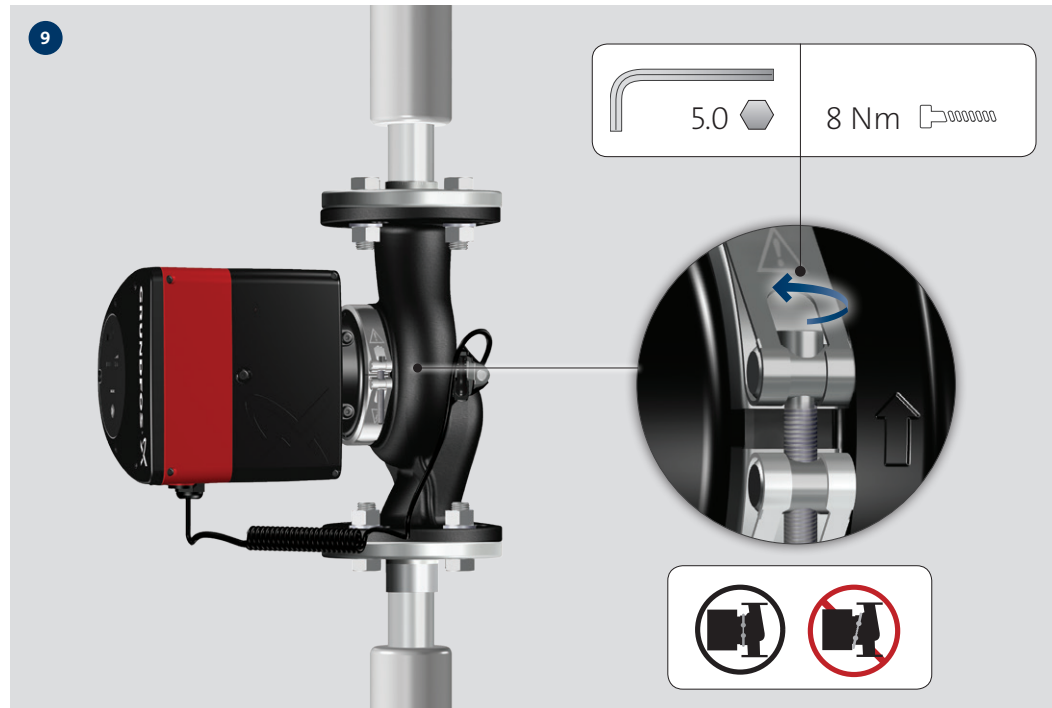



10




11













12

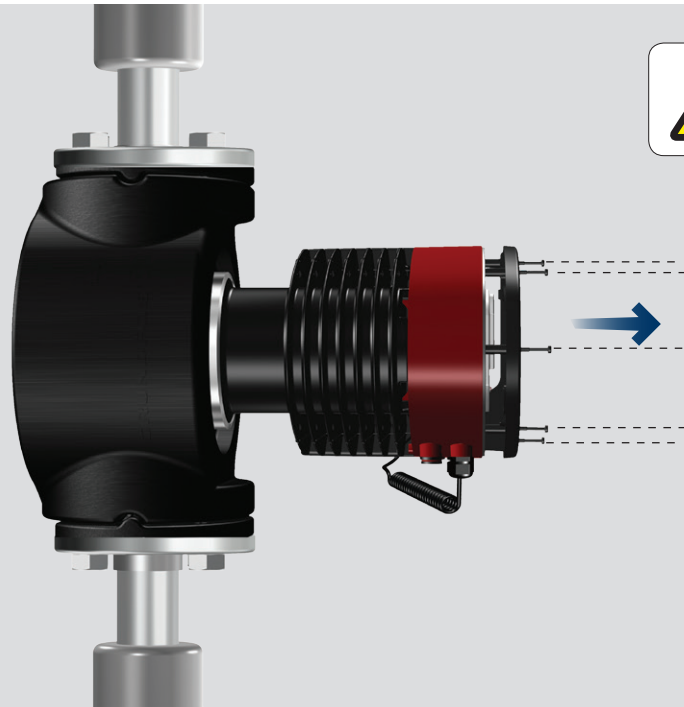

13

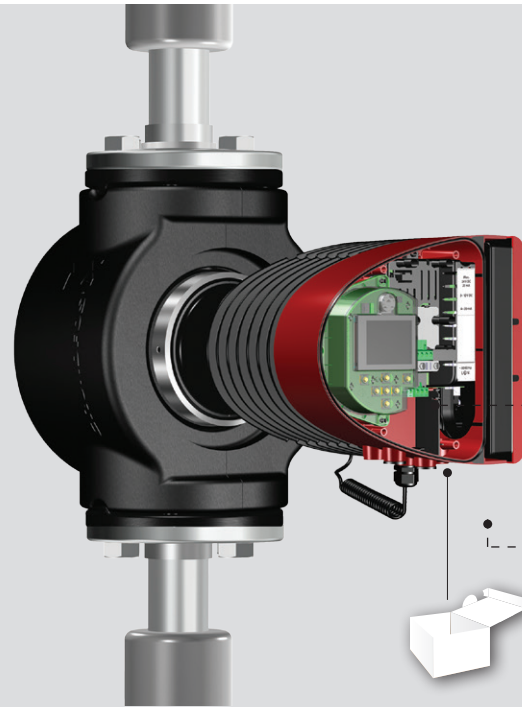


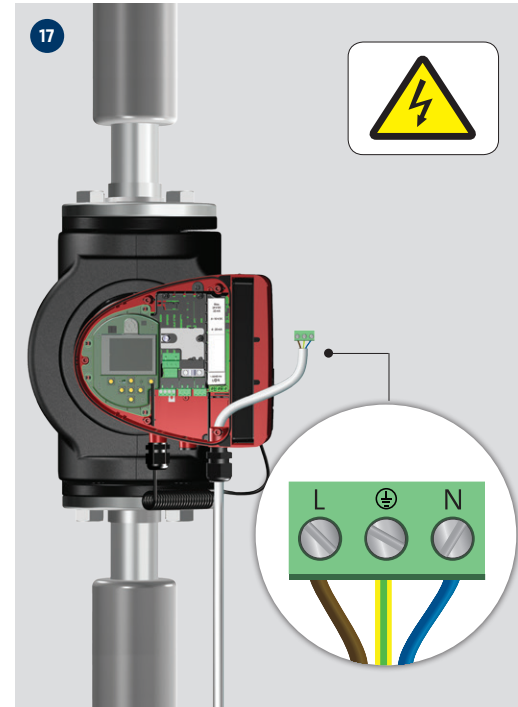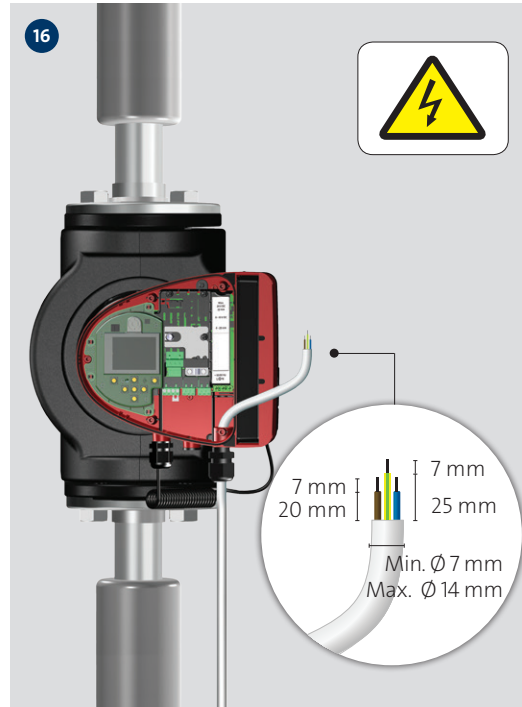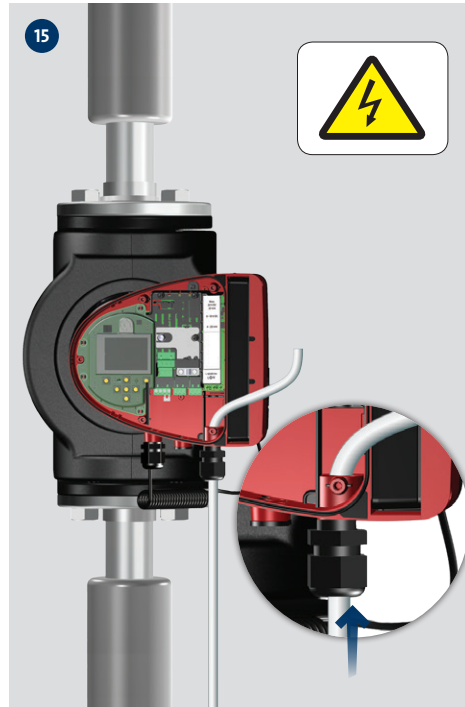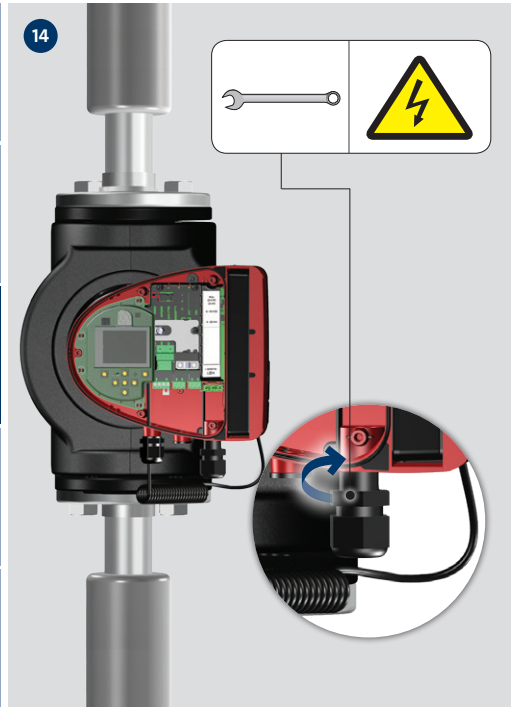

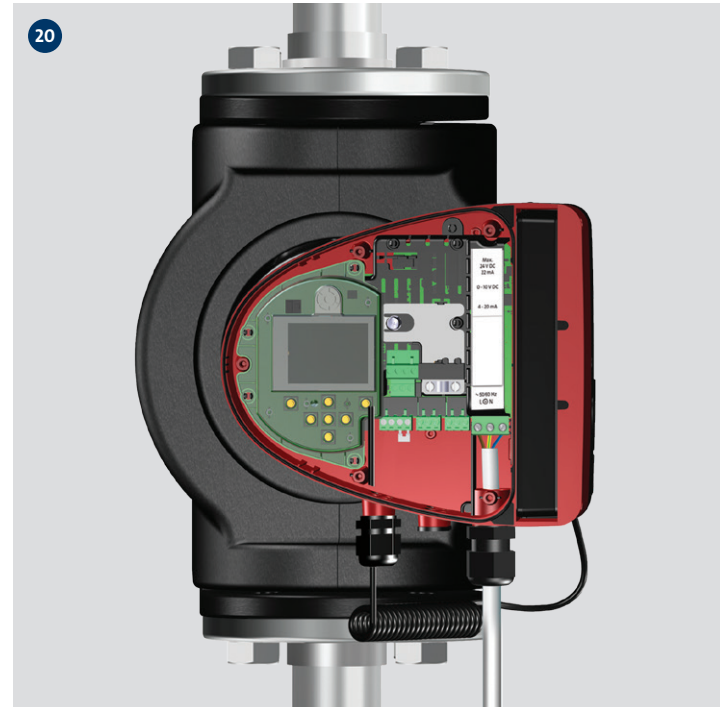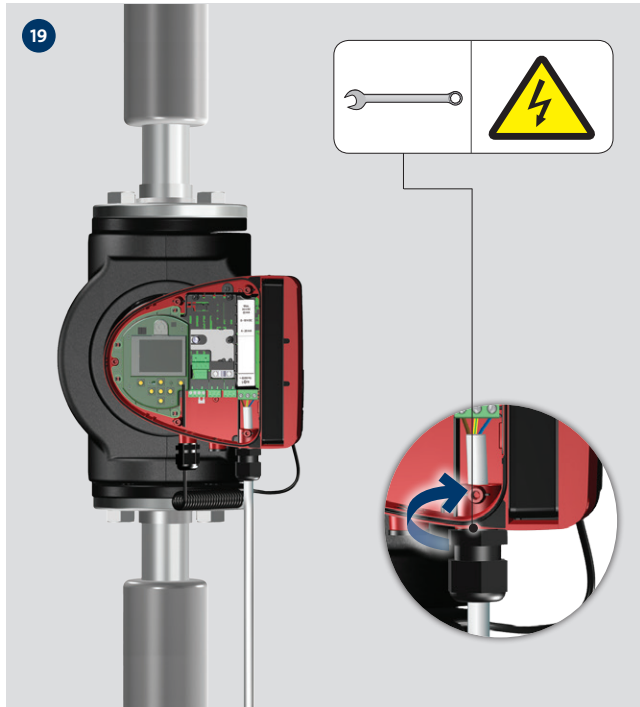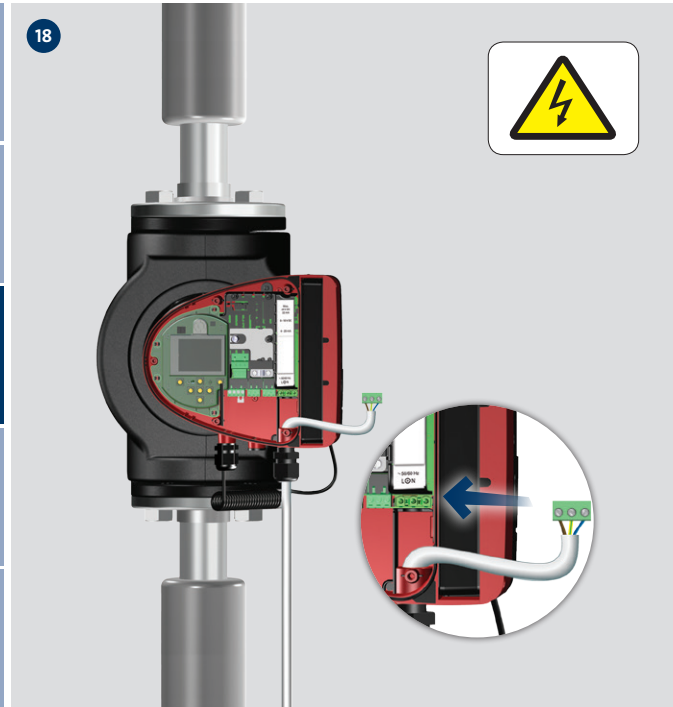




21

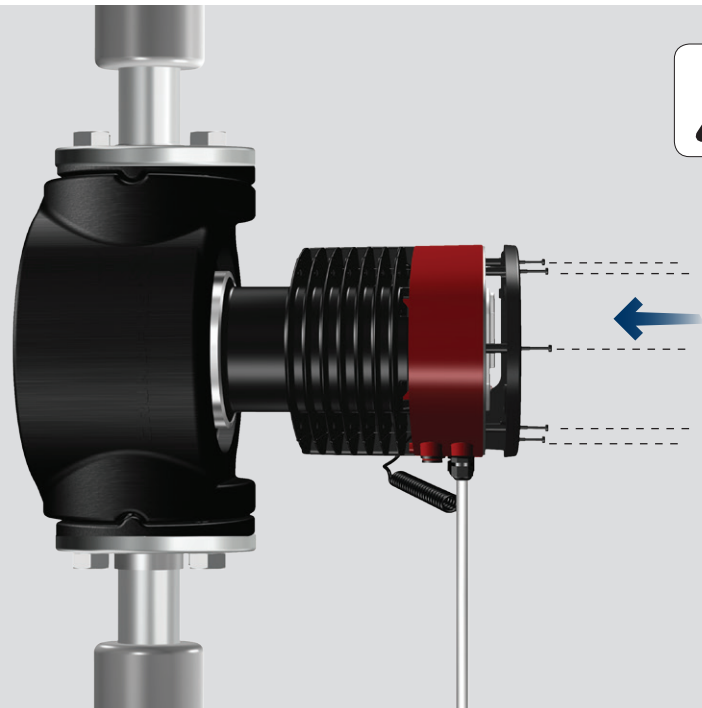

22



1/On



0/Off



23



Power cycle

Max. 4 starts
per 60 minutes



24



Further product documentation



net.grundfos.com/qr/i/98091805



be think innovate

Installation date: _____

Installer:

98091803 0917

ECM: 1217494

GRUNDFOS Holding A/S
Poul Due Jensens Vej 7
DK-8850 Bjerringbro
Tel: +45 87 50 14 00
www.grundfos.com

GRUNDFOS 

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide.